

版本号: V1.0
材质: 80克书写纸+双面单黑+对折两次 最后成品尺寸: 105*145MM
红色线框不需要印刷



- 1** This product is warranted for 12 months from the date of purchase.
Subject to the conditions of this warranty, the Customer Care Centre will perform necessary service on the product without charge for parts, or labour if, in the opinion of the manufacturer/ manufacturer's agent, the product is found to be faulty within the warranty period.
- 2** This warranty only applies if the product has been installed and used in accordance with the manufacturer's recommendations (as noted in the operating instructions) under normal use and reasonable care. The warranty covers normal domestic use only and does not cover damage, malfunction or failure resulting from use of incorrect voltage, accident, misuse, neglect, build-up of dirt or dust, abuse, mis-adjustment of customer controls, mains supply problems, thunderstorm activity, infestation by insects or vermin, tampering or repair by unauthorised persons (including unauthorised alterations), exposure to abnormally corrosive conditions or any foreign object or matter having entered the product.
- 3** If warranty service is required you should:
- Telephone the Customer Care Centre on 1300 662 946
 - Provide a copy of your purchase receipt that shows retailer's identity and date of purchase.
 - Send or bring the product to your Customer Care Centre.
Please note that freight to and/or from your Customer Care Centre must be arranged by you.
- 4** The warranties hereby conferred do not extend to any costs associated with the delivery, handling, freight or transportation of the product or any part thereof or replacement of and do not extend to any damage or loss occurring during, or associated with transit.

**THIS WARRANTY CARD AND THE PURCHASE DOCKET
(OR SIMILAR PROOF OF PURCHASE)
SHOULD BE RETAINED BY THE CUSTOMER AT ALL TIMES**

**TROUBLE SHOOTING HELP LINE
(03) 9321 8300**

Customer Care Centre
562 Spencer Street, West Melbourne
VICTORIA 3003

Pro.2
Providing AV Solutions


This advice does not limit, override or later your guaranteed rights under the Australian Consumer Law, including remedies for any failure of the Consumer Guarantees, which may include repair or replacement or it a Major Failure (as defined under the Australian Consumer Law) a replacement or refund. These guaranteed rights cannot be varied by Pro.2 or retailers of its products and have no set time limit.

Pro.2

Audio Extender over Cat5e/6 Cable

Model: DAE01

Operating Instructions

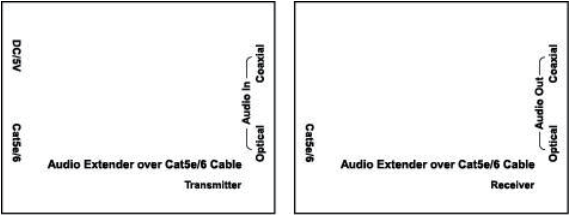

Dear Customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

FEATURES

- Transmission Range: Up to 990ft (300 meters)
- Accepts Digital Coax or Optical Toslink
- Supports Digital 5.1 (DTS, Dolby Digital, etc.)
- High performance, zero signal loss
- Data Transmission Rate: 12.8 Mb/s
- S/PDIF (Digital Coax): 96 kHz performance

NOTE: To get better result, requires IEEE-568B cable termination standards for the Cat5/6 cable.

NOTICE

Our company reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

TABLE OF CONTENTS

Specifications
Package Contents
Panel Descriptions
Connection Diagram
Warranty

SPECIFICATIONS

Operating Temperature Range	-5 to +35°C(+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Data transfer speed	12.8 Mb/s
Connectors Transmitter	1xCat5e/6 out 1xPower DC 2xAudio in(for Optical and Coaxial)
Connectors Receiver	1xCat5e/6 in 2xAudio out(for Optical and Coaxial)
Audio format	Dolby 5.1, DTS Digital etc
Power consumption	1watts(Maximum)
Dimension (L×W×H)	60.5x46.5x20mm
Net Weight	150g(Pair)


Note1: Specifications are subject to change without notice. Mass and dimensions are approximate.

PACKING CONTENTS

- 1) Main Unit. Audio Extender over Cat5e/6 Cable
- 2) Operating Instructions
- 3) Power adapter DC 5V 1A x1PCS


PANEL DESCRIPTIONS

Transmitter Panel

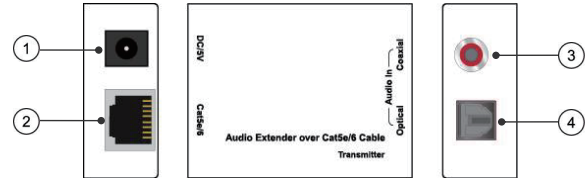

- 1) DC5V Power.
- 2) Cat5e/6 output port.
- 3) Coaxial input port.
- 4) Optical input port.


Receiver Panel

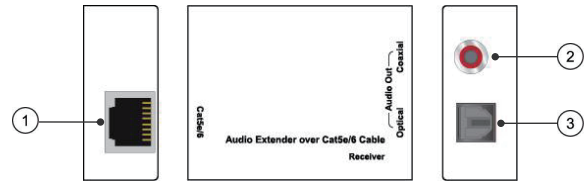

- 1) Cat5e/6 input port.
- 2) Coaxial output port.
- 3) Optical output port.

Connection Diagram

Application 1:

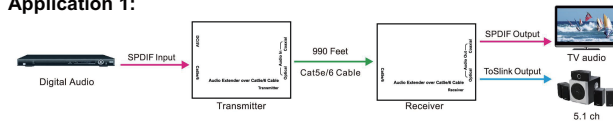

Application 2:

