


HDMI to SDI Converter, with 2 SDI outputs

Model: HDMI2SDI

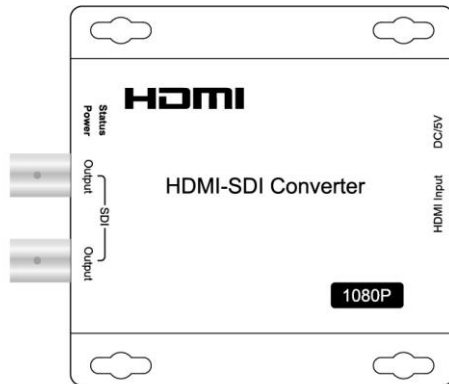

FEATURES

- Convert HDMI to SD/HD/3G-SDI.
- Distributes 1 HDMI source to 2 SD/HD/3G-SDI output simultaneously.
- Support HDMI input resolutions:
1080p (50/60/59.94/30/29.97/24/23.98Hz)
1080i (60/59.94Hz), 720p (60/59.94/50Hz), 480i (60/59.94HZ)
- Work with the SDI2HDMI to cascade many layers.
- Support transmission distance up to 100m over RG59 cable.
- With mounting ears.

SPECIFICATIONS


Operating	-5 to +35°C(+23 to +95°F)
Operating Humidity	5 to 90%RH (No Condensation)
Resolutions Support	1080p (50/60/59.94/30/29.97/24/23.98Hz) 1080i (60/59.94Hz), 720p
SDI Standard	3G -SDI/HD-SDI/SDI
Input	1x HDMI (Standard Type A connector)
Output	2x SDI(BNC)
Power consumption	2.5watts(Maximum)
Dimension (L×W×H)	95x95x29mm
Net Weight	245g

**Note: Specifications are subject to change without notice.
Mass and dimensions are approximate.**

PACKING CONTENTS

- 1) Main Unit. HDMI -SDI converter.
- 2) DC5V 1A Power Supply.
- 3) Operating Instructions.

PANEL DESCRIPTIONS

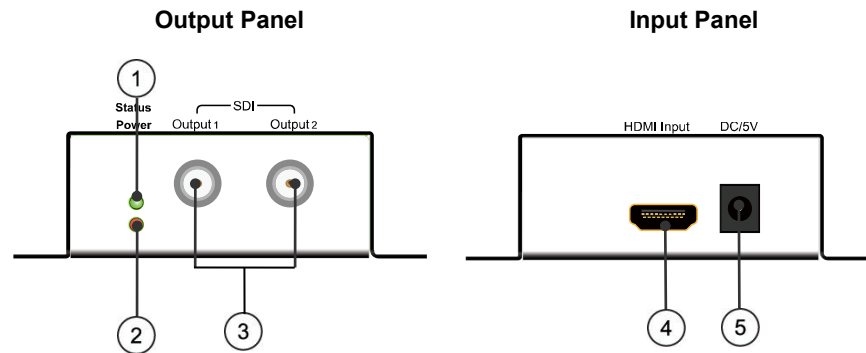

- 1) Indicator of SDI Output
- 2) Indicator of power Input
- 3) SDI/HD-SDI Output port
- 4) HDMI input port
- 5) Power input

Connecting and Operating

1. Ensure the Converter is disconnected from power.
 2. Connect source to the HDMI input and sink to SDI output.
 3. Connect 5VDC power to the converter.
- Attention: Insert/Extract cable gently

Typical Application

