


OH6 ONE-HANDER

Earthquake Sound recognizes that standing on top of a ladder to install speakers can be a aggravating task for anyone. The newest member of Earthquake's line of architectural speakers addresses this issue and gives to you the OH6. Designed for a broad audience from the DIYer to the audio integrator, this in-wall/in-ceiling speaker is the perfect choice for any audio project. The 6.5" 2-way coaxial was made for both performance and ease of installation in mind. Fitted with a revolutionary EZ Mount System, it sets itself apart from others in that

it offers a frustration-free experience for all skill levels making your installations ultra-fast and stupid simple. Constructed with quality components and compatible with a variety of wall thicknesses, the OH6 is an ideal choice for those who desire a more invisible or discrete integration. The OH6 is excellent whether used for music or home theater applications and will complement any new or pre-existing construction. Make your audio jobs a breeze and enjoy a rich, full-bodied sound with the all new Earthquake Sound OH6.

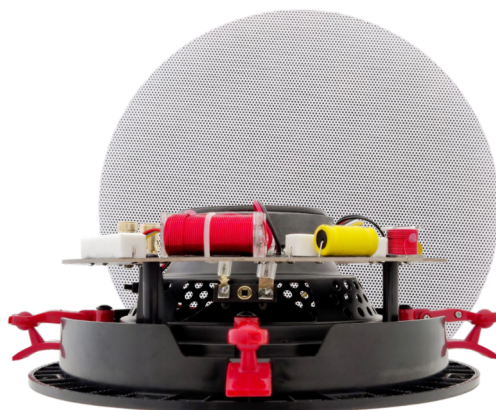

Round magnetically attached grilles included
(Square grilles sold separately)

FASTER INSTALLATION WITH SUPERIOR SOUND QUALITY

EZ MOUNT SYSTEM

Make installations easier by simply cutting the mounting hole, attach speaker wires, push speaker into place, and rotate the tweeter bridge to secure it to the drywall. Lock it and done!

TONAL CONTROLS

A 3-position bass and treble selector switch on the OH6 allows the listener to fine-tune low and high frequencies to meet their preferences based on sitting position as well as application.

Bass: -4/-2/0 Treble: -2/0/+2

2-WAY COAXIAL DESIGN

The OH6 is a 2-way system equipped with a 6.5" (165mm) stiff woven carbon fiber cone midrange/bass driver for lower distortion and a whopping 1" (25mm) pivoting silk dome neodymium tweeter for precision sound staging.

SEAMLESS INTEGRATION

The OH6 accepts a drywall thickness of 0.5" (12mm) to 1" (25mm) making it an extremely versatile option whether installed for home theaters or commercial spaces. With a magnetically attached and paintable grille, the edgeless design of the OH6 gives this speaker a high-end and professional look that will blend in with any décor.




SPECIFICATIONS

MODEL	OH6
Midrange/Bass Size	6.5" (165mm)
Woofer Material	Carbon Fiber
Surround Material	Butyl Rubber
Tweeter Size	1" (25mm)
Tweeter Material	Silk Dome, Neodymium
Frequency Response	50Hz-15kHz
Power Handling	150W MAX
Sensitivity	87dB 1W/1M
Impedance	8-Ohm


MODEL	OH6
Frame Diameter	9.05" (230mm)
Cutout Diameter	7.87" (200mm)
Grille Diameter	9.13" (232mm)
Mounting Depth	3.14" (80mm)
Magnet Diameter	3.34" (84mm)

Shallow mounting depth allows OH6 to fit inside most standard walls.


EZ Mount System





Turn tweeter bridge clockwise

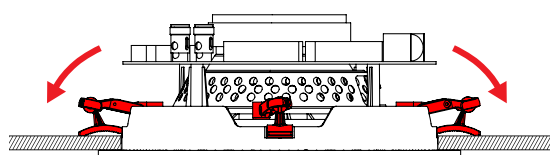

Dog ears engaged



Lock dog ears in place

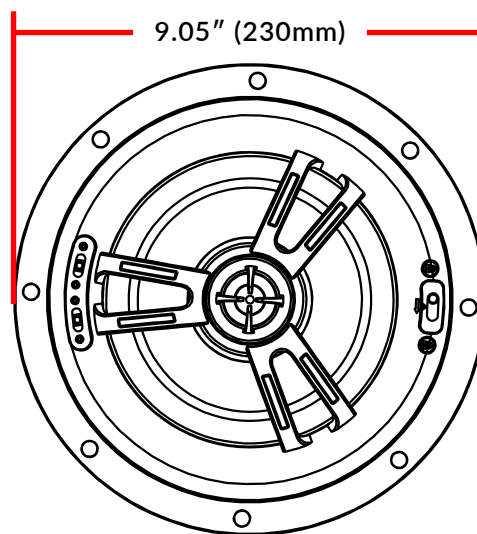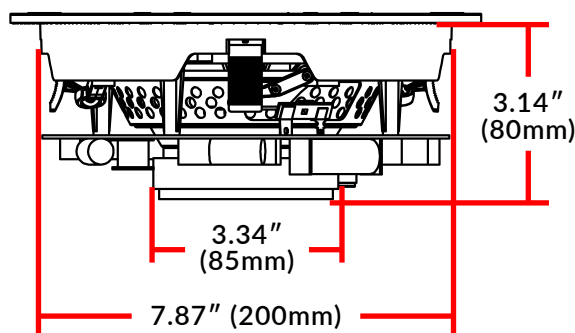

Earthquake Sound Corporation

2727 McCone Avenue, Hayward, CA 94545 • www.earthquakesound.com • 510-732-1000

©2020 Earthquake Sound Corporation

All copyrighted, trademarked, and patented elements mentioned herein are the sole property of Earthquake Sound Corporation.