

18GBPS HDMI SPLITTERS

2, 4 & 8 WAY

SLIM DESIGN



Pro2's high quality HDMI splitters take a single signal input
— Bluray, HD TV, PayTV (Foxtel), Xbox, PlayStation etc.
— and split them into multiple outputs without any signal loss.




- Slim design, great for hiding behind TVs
- Up to 4K HDMI 2.0 UHD
- Great for today's 1080p 3D
- Supports 36 bit Deep Color
- Display resolutions up to 3840 x 2160
- Powered for extended cable runs, equalising signals and re-clocking output
- Built-in EDID simulator and HDCP key-set allows each output to work independently when connecting to an HDMI display
- Ideal for a simple home setup up to a 16 monitor commercial installation
- Robust metal case of solid construction

HDMI Source

2 Way Splitter

Multiple Outputs

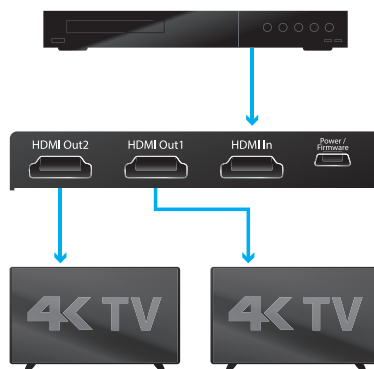

MODEL: HDMI2SPV2

CODE: 64510014

OUTPUT 2 Way

POWER USB



MODEL: HDMI4SPV2

CODE: 64510024

OUTPUT 4 Way

POWER 5V DC



MODEL: HDMI8SPV2

CODE: 64510034

OUTPUT 8 Way

POWER 5V DC

SPECIFICATIONS

HDMI Inputs	1
Supports	3D / 4K x 2K
HDCP Compliance	v2.0
HDMI Resolutions	480p / 720p / 1080i / 1080p @ 60 Hz / 4K x 2K @ 24 Hz 4K x 2K out @60G YUV4:4:4
Audio Formats	LPCM / Dolby-AC3 / DTS 7.1 / DSD
Data Transfer Speed	18 Gbps
Input Video signal	5.0 Volts P-P (TTL) Single Link
Video Amplifier Bandwidth	140 MHz
Transmission Distance	15 metres using standard HDMI/26AWG cable
Operating Temp. Range	-15°C to 55°C (23°F to 95°F)
Operating Humidity Range	5 to 90% RH (no condensation)

	HDMI2SPV2	HDMI4SPV2	HDMI8SPV2
HDMI Outputs	2	4	8
Power Supply (included)	5V 1A DC	5V 1A DC	5V 1A DC
Dimensions (LxWxH)	93.6x61x15mm	150x64.2x17mm	247.2x110x17mm
Weight	120g	245g	610g
Power Consumption	1W	2W	5W



Deep Colour

x.v.Colour

GOLD
PLATED CONNECTORS